




SOLAR SERIES M

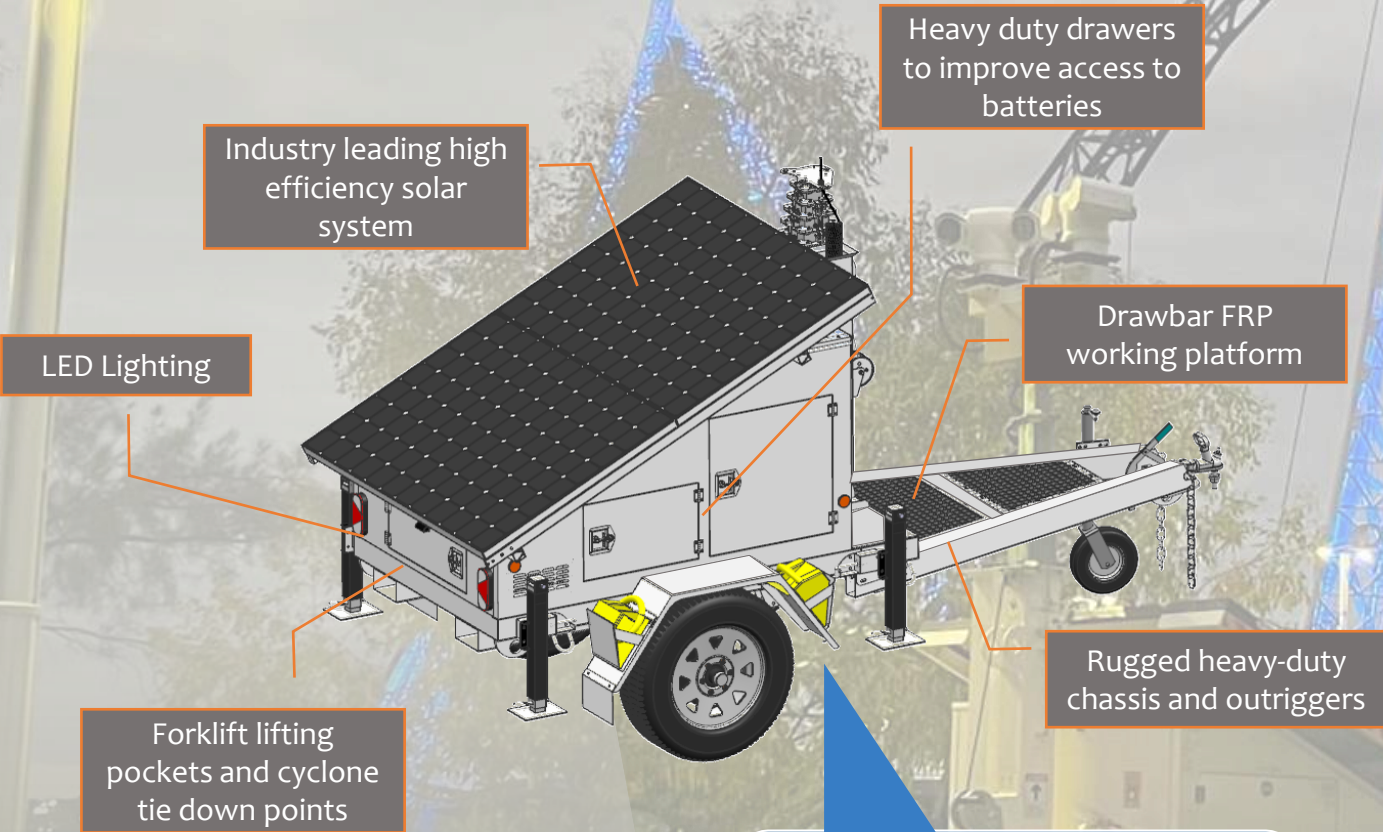

TRAILER SPECIFICATION			
MAKE	Solacraft	COUPLING	50mm ball or 75mm ring
MODEL	S6-MCM	TYRE/RIM	31 x 10.5 R 15 LT
TYPE	Single Solid Axle Solar	BRAKE	Mech over-ride w/ handbrake
TARE/AGG kg	1140 / 1500	L x W x H mm	4050 x 1781 x 2010
MAST	Vertical fixed, telescopic SHS	MAST WINCH	Brake Hand Winch
SOLAR	2 x 415w Sunpower MAXEON 3	REGULATOR	Victron Smart Solar 100 30
BATTERY	4 x 100Ah 12V Gel	CONNECTIVITY	Victron Connect

- ### FEATURES
- Rugged single axle chassis with lockable ventilated battery enclosure
 - Heavy-duty battery drawers for safe and easy access to batteries
 - Scalable battery capacity for increase runtime
 - Internal mounting plinths for multiple IP rated equipment cabinets
 - Victron Energy regulators with Bluetooth and VE.Connect capabilities
 - Rear forklift pockets and cyclone tie down points
 - Hot dip galvanised chassis and powder coating on some components
 - LED trailer lighting
 - Heavy duty suspension and rugged all terrain off road tyres
 - 4 x heavy duty height adjustable corner jacks & outriggers
 - Lockable main isolation switch
 - 4 x wheel chocks mounted on wheel guards, wheel nut indicators
 - Air filtration foam in ventilation openings
 - 24V DC power with voltage conversion available to suit any end user equipment

Average daily yield:
Stored capacity:

4-5kW/hr (based on 5.5hrs full sun)
4.8 kW/hr (100% depth of discharge)